

# Body Belt Ordering Procedure

The catalog number used to order a Lineman's Body Belt is made up of specific parts. Each part of the number refers to a component or component size. The following is a typical example of a catalog number: 5278N-24D



Use the following ordering procedure to properly identify and select each component in order to create a catalog number for your Lineman's Body Belt.

**1. Know the job and regulations** governing performance requirements for the equipment needed.

**2. Select the belt style.** Klein lineman's body belts are available in a choice of full-floating, semi-floating, and fixed styles, and feature the choice of belt pad size. All Klein lineman's body belts have chrome-tanned leather cushions for greater comfort. Full-floating belts allow lateral movement of the D-rings during use. Semi-floating and fixed-style belts allow no lateral movement of the D-rings.


**3. Select the proper belt size.** The comfort of a lineman's belt depends on the construction of the belt and the location of the D-rings. The D-rings should be located about 1" (25 mm) in front of the hip bones.

**Never order Klein lineman's body belts by waist size. Always order Klein lineman's body belts by the desired distance between D-rings.**



Size your body belt using a tape measure (Figure 1). To obtain the correct D-to-D (D-ring to D-ring) size, measure around the back from hipbone to hipbone and then add 2" (51 mm).

The Lineman's Belt Sizing Table (shown below) contains more information on selecting the proper belt size. For non-standard sizes, please call the Klein Tools Sales Department at 1-800-553-4676.

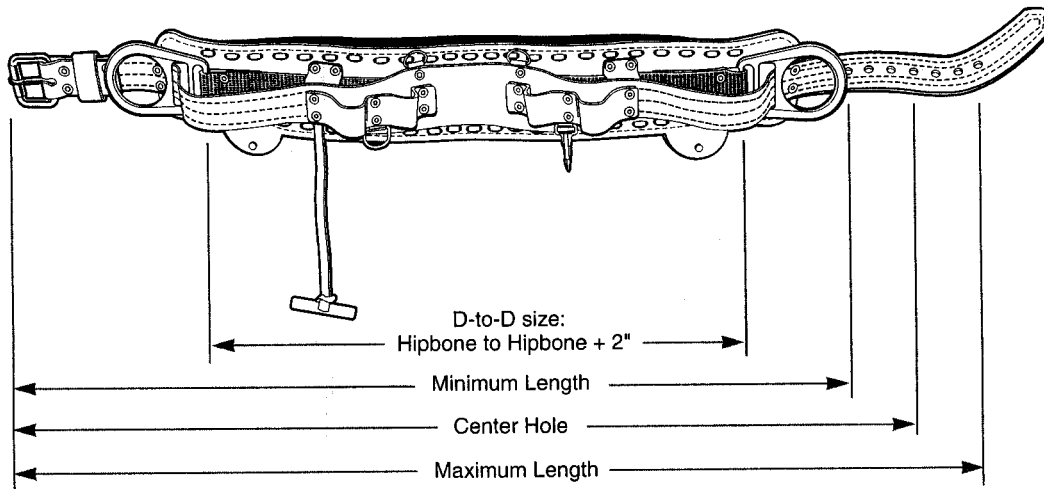

**Lineman's Belt Sizing Table\***

D-to-D Distance**	18D	19D	20D	21D	22D	23D	24D	25D	26D	27D	28D	29D	30D
	(46)	(48)	(51)	(53)	(56)	(58)	(61)	(64)	(66)	(69)	(71)	(74)	(76)
Minimum Length	32	33	34	36	37	38	40	41	42	44	45	46	47
	(81)	(84)	(86)	(91)	(94)	(97)	(102)	(104)	(107)	(112)	(114)	(117)	(119)
Center-Hole Distance	36	37	38	40	41	42	44	45	46	48	49	50	51
	(91)	(94)	(97)	(102)	(104)	(107)	(112)	(114)	(117)	(122)	(124)	(127)	(130)
Maximum Length	40	41	42	44	45	46	48	49	50	52	53	54	55
	(102)	(104)	(107)	(112)	(114)	(117)	(122)	(124)	(127)	(132)	(135)	(137)	(140)

\* All measurements are listed in inches and (cm). This table shows the maximum and minimum lengths and center-hole distances for the full range of standard D-to-D measurements. A belt sized for the proper D-to-D size will fit correctly with buckle tongue engaged in the center hole.

\*\* Non-standard D-to-D sizes can be special ordered; please call the Klein Tools Sales Department at 1-800-553-4676.

# Harness Ordering Procedure